


Double Sided Polyester Tape

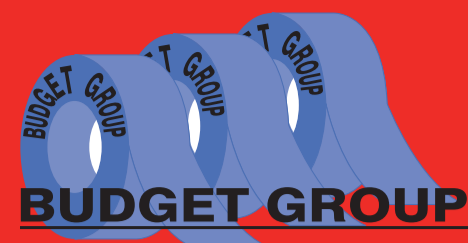

TECHNICAL DATA SHEET

PRODUCT: B789

PROPERTIES: A high clarity clear double sided polyester tape, .22mm thick coated with a solvent acrylic adhesive and a red OPP die cuttable release liner. The tape features excellent adhesion and holding force to a wide variety of surfaces.

FEATURES: The product is a high performance double sided polyester tape with excellent initial tack and high shear adhesion. It displays excellent UV, weather and temperature tolerance. The product also exhibits a high resistance to plasticiser and features moisture stability and chemical resistance.



APPLICATIONS:

Ideally suited to a wide variety of industries which include but are not limited to:

- Curtains and Blinds
- Trim mounting
- Acrylic Bonding
- Signage and Display
- Extruded plastic profiles

SPECIFICATIONS

Total Thickness	0.215mm - 0.225 mm
Coating Thickness (A/B Side)	0.095mm - 0.100mm
Initial Tack (A/B Side) (PSTC-6 #14 Ball)	<5cm
Holding Power (A/B Side) (PTSC-7)	> 24 hrs 1kg/2.5cm x 2.5cm
Holding Power for Temp. Resist 60C (PSTC-7)	< 24 hrs 0.5kg/2.5cm x 0.5cm
Adhesion [A/B Side] [PSTC-1]	> 2500g/2.5cm
Solvent Resistance	Good



21A Shafton Street Huntingdale Vic 3166
Telephone:(03) 9544 1977 Facsimile:(03) 9544 7113
Web: www.budgetgroup.net